


Installation

Important Notice when Mounting Flush Back boxes to Plaster Board Studwork walls.

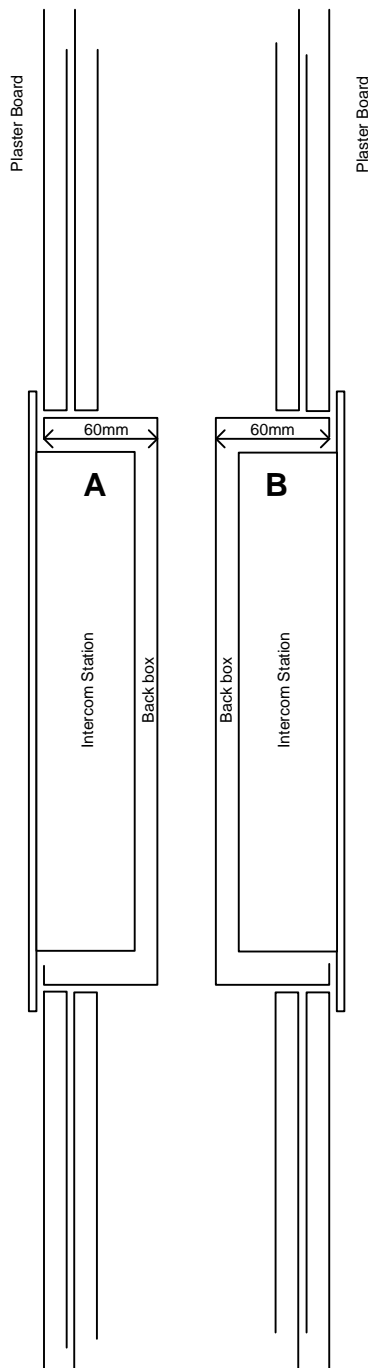

NOTE

Flush mounted Intercom stations should not be mounted back to back in a studwork wall, where sound can move between the Stations, feedback will become a problem if All Call is used or if station A calls station B.

Feedback is a constant note that is heard when the microphone in one station can hear the speaker in another station.

Sound deadening materials can reduce sound traveling between stations. Sound absorbing sheets of putty can be shaped to fit inside the back box. This will help. But best practice is to mount station at least a metre apart.

When used on a clean room pass through window, try to mount the two stations on opposite sides of the pass through.