




TRIC6

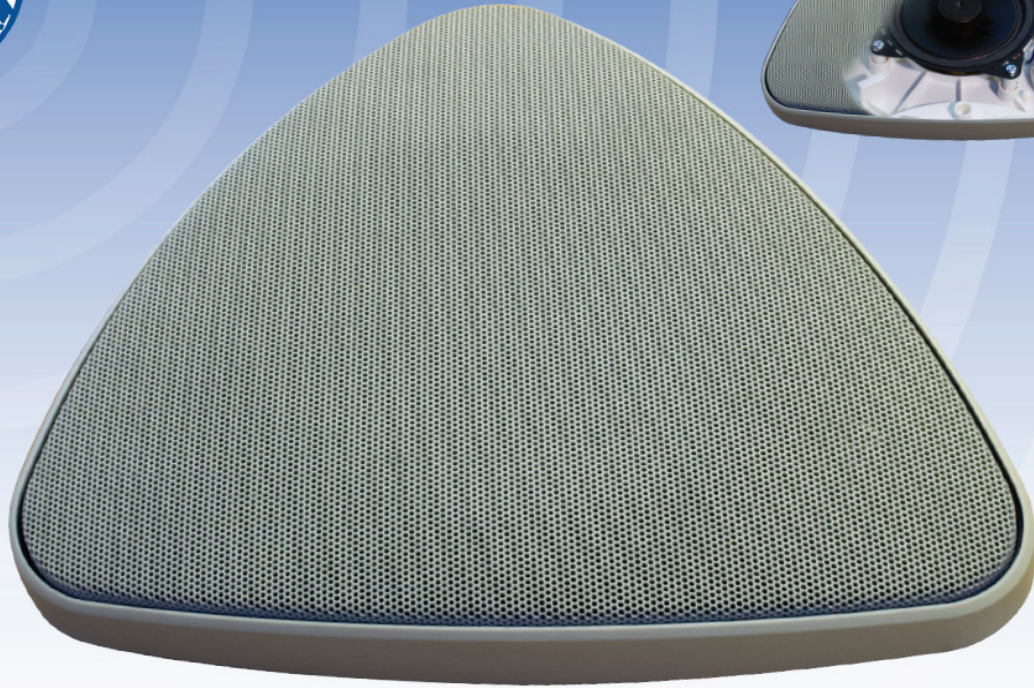

6 Watt Concept Cabinet Speaker

Extremely low profile for architecturally sensitive environments

Concealed fixing points prevent unauthorised access from members of the public

Manufactured in high density plastic for durability

Simple connection to 6 watt multi tap Toroidal transformer

Simple mounting procedure provides time saving installation

Offices

Showrooms

Retail Outlets

Boardrooms

Hotels

Galleries

Tel 01638 660 629
Email sales@ringuk.com
Web www.ringuk.com



ISO 9001 CERTIFIED


DNH^{AS}

N-3770 Kragerø
NORWAY

Phone: (47) 35 98 56 00
Fax: (47) 35 98 56 10
E-mail: dnh@dnh.no
Web-site: www.dnh.no

DNH WW Ltd.	Phone:(44) 1908 275 000
England	Fax:(44) 1908 275 100
	E-mail: dnh@dnh.co.uk
DNH GmbH	Phone: (49) 040 6569 30-0
Germany	Fax:(49) 040 6569 30-30
	E-mail: dnh@dnh.de


TRIC-6

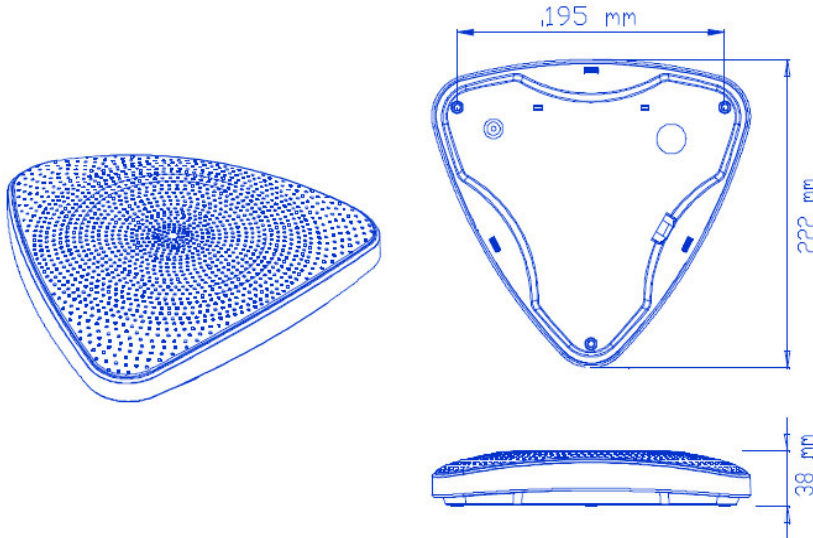

Transformer:
Combined
70/100Volt line
White : Red 100 V
White : Green 70 V

Secondary nominal
tappings:
1 : 2 6,0 W
1 : 3 3,0 W
1 : 4 1,5 W
1 : 5 0,5 W

Sound pressure levels at different frequencies at 1W/1m pink noise.

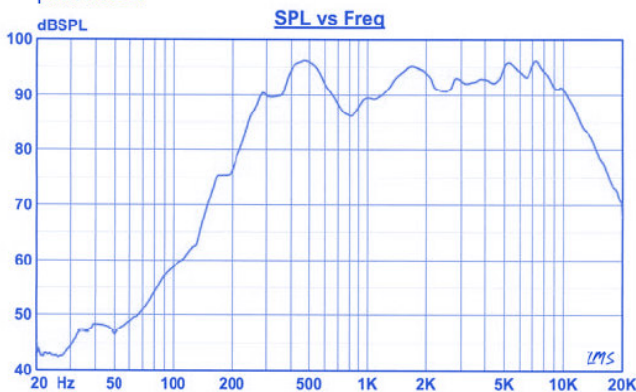

Material / Color	ABS / RAL 9010
Mounting	3 screws
Termination	Internal screw terminals
Weight	0,8 kg
IP-rating	
Max. / min. amb. temp.....	90 °C / -20 °C
Standard version	100 V transformer
Rated / max. power	6 W / 10 W
SPL 1W/1m.....	88 dB
SPL rated power	96 dB
Effective freq. range.....	180 – 18000 Hz
Dispersion vertical (-6dB) 1kHz / 4kHz.....	180° / 110°
Options	Impedance, color, label

Installation, Operation and Maintenance Procedures

- To open the loudspeaker, press the two clips on each side of the loudspeaker and separate the cabinet from the chassis.
- Enter the cable trough a suitable cable entrance.
- Fasten the chassis to the wall or roof with 3 screws.
- Clip the cabinet on to the chassis after termination.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.



DNH reserves the right to alter specifications without notice.

Rev. 03.01.2008

C E R T I F I C A T E

DNH, Den Norske Høytalerfabrikk AS
Kragerø, Norway


has implemented and maintains a Quality Management System
which fulfills Nemko's provisions for Management System Certification and
the requirements of the following standard

NS-EN ISO 9001:2000

The certificate covers the following activities:

Design/development, purchase, production
and marketing of loudspeakers

Oslo, 2007-09-24

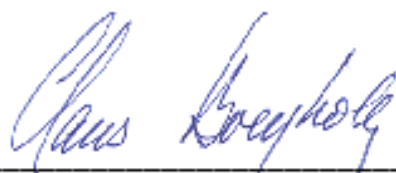

Claus Breyholtz
Nemko AS, Certification Department