

1007036210

Desk/Wall Master Station

10 TAD



DESCRIPTION

- Combined wall and desk master station with full access to all features in Vingtor-Stentofon AlphaCom XE exchange
- Can be used as wall mounted station using the optional bracket 1008091100
- 10 programmable single touch keys with name tags
- Selectable private / open mode
- · Superb audio quality
- Advanced supervision functions

This combined desktop and wall mount master station has full access to all features of the Vingtor-Stentofon AlphaCom XE exchange of which many are developed specifically to provide critical communications such as group call and call priority.

The station includes programmable single touch keys for fast access to important functions. A private/open switch allows for choosing between direct incoming calls and announcement of incoming calls by a ringing tone.

The station provides high quality hands-free conversations, using the Vingtor-Stentofon superb wideband audio and loud volume. The station can be placed up to 4 km from the AlphaCom exchange without need for any local power source. The station uses the traditional 4-wire interface receiving both power and audio in the same cable.

To provide maximum availability the station comes with advanced supervision functions. The station line test will detect whether there are any faults in the network or station electronics. In addition the station supports tone test, testing the complete transmission path including microphone and speaker. The status of the stations is reported to AlphaWeb as well as to 3rd party management systems using SNMP, Syslog or OPC. Station cables of different lengths, wall sockets and a bracket for wall mounting are available as accessories.

See also: additional documentation on wiki.zenitel.com

Created: 01.07.2014, updated: 30.09.2022

page 1/3

www.ringuk.com

sales@ringuk.com

SPECIFICATIONS


MECHANICAL

Dimension (WxHxD)	168 x 75 x 176 mm / 8.85 x 2.95 x 6.92 inch.		
Weight	0.410 kg / 0.90 lbs		
Keypad	Full keypad including 10 DAK keys		
Mounting	Desktop. On wall with optional bracket		
Temperature	0 to +50°C		
Loudspeaker output	Max. 1 W RMS		
Frequency range	200 - 10'000 Hz		
Connectors	RJ45		
Wiring	2 twisted pairs		
ORDER NUMBER	DESCRIPTION	SHIP WEIGHT	
1007036210	Desk/Wall Master Station, Color grey	0.410 kg/0.90 lbs.	
KB171	Wall Socket, RJ45, Surface Mounted		
1009800130	3 meters Station Cable with RJ45 Connector		
1009800115	0.5 meters Station Cable with RJ45 Connector		
1008091100	Wall bracket for Desk/Wall Station		
GENERAL			
Max cable distance	4.0 km (18 AWG - 0.9 mm). 3.4 km (20 AWG - 0.8 mm). 2.0 km (22	4.0 km (18 AWG - 0.9 mm). 3.4 km (20 AWG - 0.8 mm). 2.0 km (22 AWG - 0.6 mm). 1.4 km (24 AWG - 0.5 mm).	
Power	Powered from exchange	Powered from exchange	
Call indication	Red call LED		
Supervision	Line supervision. Tone test (manual and automatic). Station status	Line supervision. Tone test (manual and automatic). Station status in AlphaWeb.	
Compliance	CE and FCC Part 15	CE and FCC Part 15	

Created: 01.07.2014, updated: 30.09.2022

page 2/3

TECHNICAL DIMENSIONS

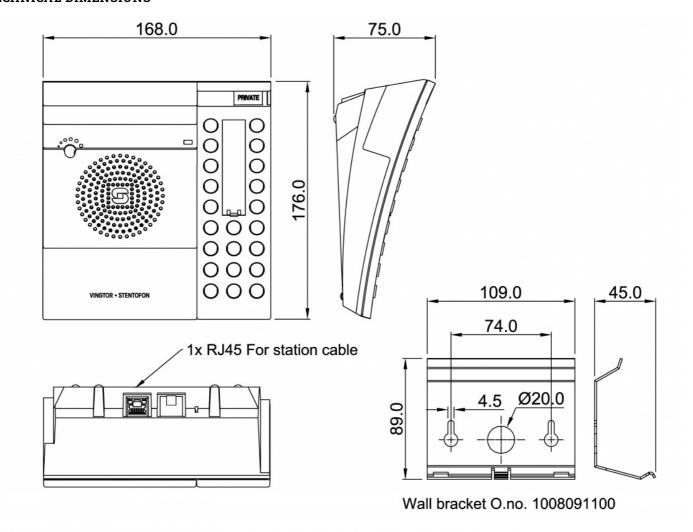

ACCESSORIES



KB171Item number: 3007600034

WALL BRACKET FOR DESKTOP

Item number: 1008091100