

1008123040

TFIX-4

Ex IP Telephone



-  Turbine
-  IP66
-  Atex
-  Active Noise Cancelling
-  IP over 2-wire

This product has been replaced by [TFIX-1-V2](#)

DESCRIPTION

- Ex IP telephone for potentially explosive atmospheres - Directive 2014/34/EU
- Ethernet compatible 2-wire interface
- DIP functionality for use with AlphaCom audio servers
- SIP/VoIP functionality for use with 3rd-party systems
- Dust- and water-protected to IP66
- Monitoring and self-diagnostics of critical functionality
- Visible status indicators on front panel

The TFIX-4 Explosion-proof telephone is a rugged device, designed for harsh environments and meets industrial and offshore requirements as well as requirements for ATEX Zone 1 operation. The plastic housing is designed to withstand most chemical and environmental hazards found on- or off-shore.

The TFIX-4 features a full keypad with 1 programmable button and keys for manual override (PTT) and Cancel.

The telephone is fully digital and offers crystal clear audio. Active Noise Reduction allows for two-way communication with superior audio quality.

Status indicators display the status of the system and are compatible with AlphaCom and Exigo systems as well as SIP functionality for use with 3rd party systems

SPECIFICATIONS

MECHANICAL

Dimensions	345 x 178 x 101 mm
Weight	4 kg
Mounting	On-wall box (included)
Color	Black

ENVIRONMENTAL

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +70°C
Operating humidity	10% to 95% RH (non-condensing)
Storage humidity	10% to 95% RH (non-condensing)
Air pressure	600 hPa to 1200 hPa
IP rating	IP64 in accordance with IEC 60079-0 IP66 in accordance with EN 60945
IK rating	7J for enclosure 4J for cable glands

ELECTRICAL

PoE	NO, proprietary 2-wire data- and power bus
Power consumption	4.2 W (idle) to 8 W (max)
DC power	24 VDC

NETWORK

Connection	2 x 2-wire
Connection type	Screw terminals
Functions	Auto negotiating
Built-in switch	N/A
Compatibility	SIP, ICX-AlphaCom, IC-EDGE, G.711, G.722, G.729, HD Voice


INPUTS AND OUTPUTS

Handheld Microphone	Microphone (bal), PTT
Handset	Microphone (bal), Speaker (bal) + PTT
Handset	Microphone (bal), Speaker (bal) + PTT
Digital inputs/outputs	No
Relay outputs	No
Audio	Yes, for audio accessories
Aux power	Provided by network cable

CERTIFICATIONS

Immunity	EN 60945, EN 61000-6-2
Emission	EN 60945, EN 61000-6-3, EN 61000-6-4
CENELEC safety standards	EN 60079-0: 2012, EN 60079-7: 2007, EN 60079-11: 2012, EN 60079-18: 2009
IEC safety standards	IEC 60079-0: 2011, IEC 60079-7: 2006-07, IEC 60079-11: 2011, IEC 60079-18: 2009
Marking	II 2(2) G Ex e ib mb [ib] IIC T4 Gb -20°C ≤ Ta ≤ +60°C

TECHNICAL DIMENSIONS

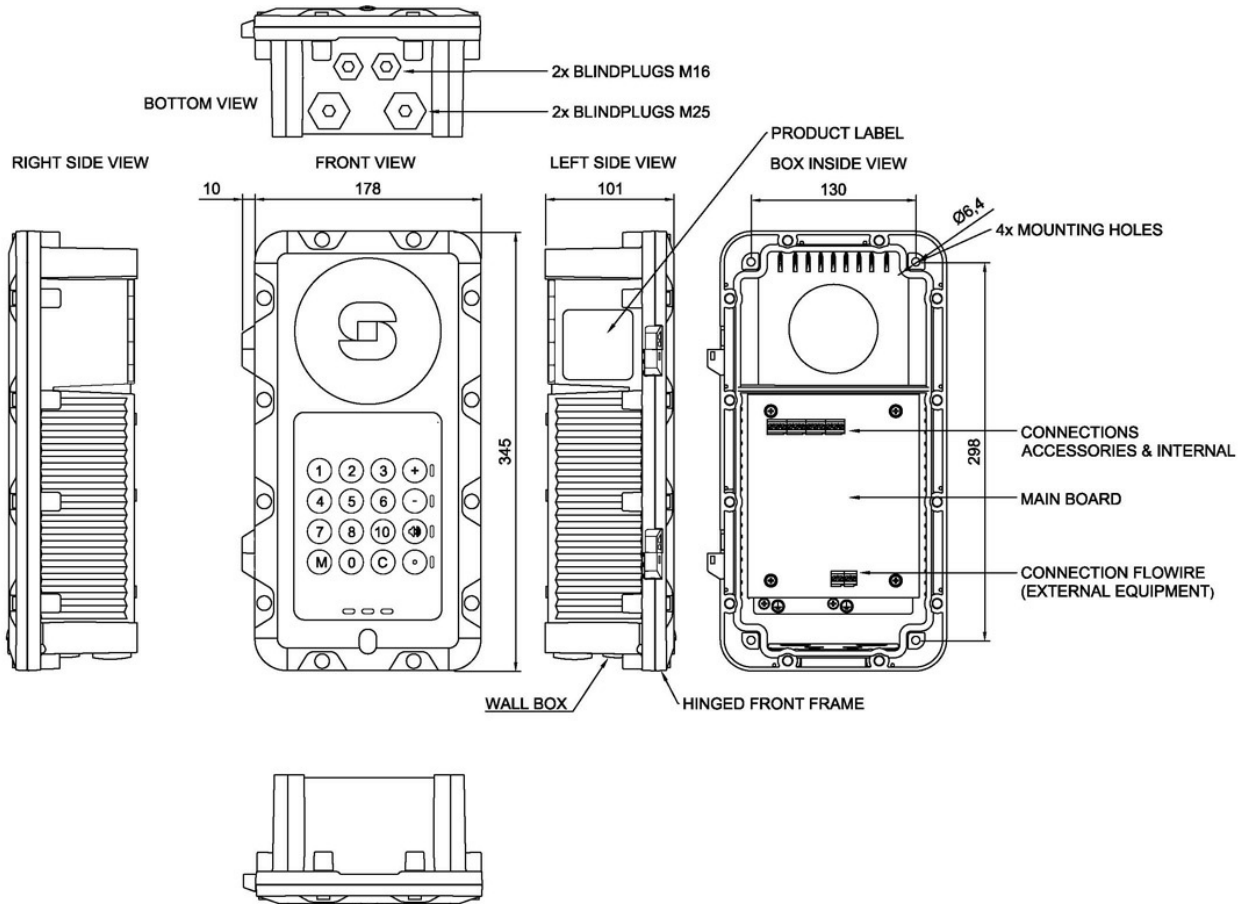

ACCESSORIES



EMMAX-1H Item number: 1023533511 **TAX-2B** Item number: 1008150025 **TAX-3** Item number: 1008150030 **AK5850HS** Item number: AK5850HS **FCDC2** Item number: 1008080210



POWER SUPPLY 100-240V AC/24VDC 4A
Item number: 2990000064



EGA-1
Item number: 1023594100